

Australia's Most Beautiful Floors PREFERENCE




Prestige Oak Flooring

If you love the look of fine oak flooring then Prestige Oak is the natural choice. Sharing the unrivalled beauty and character of traditional European Oak, Prestige Oak Flooring is a popular choice amongst leading Australian architects and designers. Design flexibility is assured with stunning extra wide planks and an extensive palette of pre-finished natural, and stained décors. Our versatile Prestige Oak range includes a selection of widths and thickness's for a variety of applications. Available in both traditional Tongue & Groove and the ever popular click system for fast and convenient installation. On-trend colours, scratch resistant coatings, Prestige Oak flooring ensures lifetime enjoyment.

Stock Profiles Available

PRESTIGE OAK CLICK


Prestige Oak Click is designed to be installed as a floating installation utilising the click method of assembly over an acoustic underlay incorporating a Moisture Barrier. Our Click stock range is 190 x 15/4 mm. The click profile is also suitable for direct fix adhesive installation.



PRESTIGE OAK T&G

{

Our Tongue & Groove (T&G) products include 220 x 21/6 mm and 190 x 15/4mm wide plank (Victoria stock T&G, click by request) and the traditional width, 160 x 12/3mm. T&G is ideally suited for direct fix adhesive installation however it can be installed as a floating method.

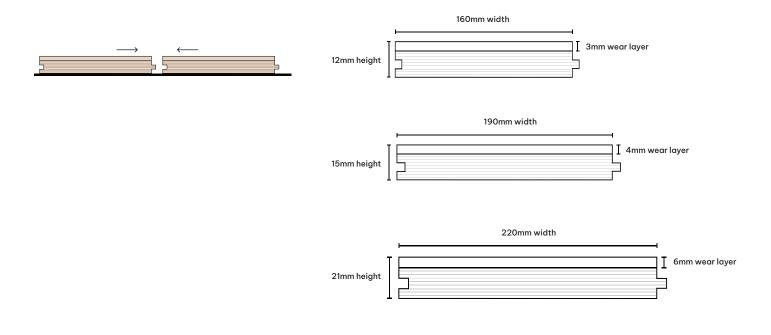

Other sizes and custom colours are a available by request. Min. volumes will apply. Please follow the strict installation guidelines for each product as some variations exist based on size, importantly follow all expansion and trim requirements. Both methods of installation require skilled installation techniques and we recommend you engage only qualified install professionals.

Details & Beauty

The unique specifications of Prestige Oak flooring make it ideal for installation throughout homes, apartments or commercial applications with the exception of wet areas such as bathrooms and laundries.

- Engineered construction, real European Oak. Easy care and maintenance, allergy free.
- Pre-finished European water-based UV lacquer. Superior matte wear resistant coating, timeless look.
- Variation in specific colours and grade may include: black & mineral streaks, sapwood, ray flecks, filled splits & knots, checks, and natural batch colour toning. These are all natural characteristics of European Oak.
- VOC Emissions: <E1. Below World Health Organisation Levels.
- Fire & Slip test certified to current Australian standards. Suitable for install over hydronic in-slab heating only.





66 Australia's most beautiful floors

AND REAL PROPERTY AND A RE





PARANA





Engineered for Quality

Creating a timber floor that shows character and charm starts with an emphasis on quality. Engineered floors are designed to provide excellent performance characteristics unmatched by solid timber floors.

Prestige Oak will have a higher resistance to humidity fluctuations than solid timber making it less susceptible to plank deformation that may result in shrinkage, expansion and cupping etc. When correctly installed your Prestige Oak floor will display the same look and feel normally associated with a natural solid timber floor.

Prestige Oak is manufactured utilising resource efficient engineering processes adding our valuable natural Oak resource where it's needed most, and that's the wear layer.

- Multi-ply hardwood construction for enhanced stability
- Grades ABCD & AB (selected colours)
- Janka hardness 5.5 6.0kN
- 160 x 12/3mm T&G
- 190 x 15 /4 mm Click & T&G
- 220 x 21/6 mm T&G
- Set length with nested shorts
- Micro bevel 4 sides and light brushed surface
- E1 VOC, water based matte coating
- Australian fire and slip test certified
- T&G & Click stair nosing available
- Suitable for hydronic in-slab heating only

AB Grade available

In our 15/4 & 21/6mm ranges we have introduced a small range of T&G pre-finished colours in AB Grade. The higher visual grade features less knots and natural characteristics than our standard range, it's ideal for those seeking clean, uncluttered lines to enhance interior design visuals.

66 Design simplicity, a harmonious link with nature

言語能

BONDI

COLOUR RANGE

160 x 12/3mm T&G Profile

If you're looking for a traditional width timber plank our 160mm wide range provides an excellent choice for renovations with existing floors and perfect for new interiors. ABCD Grade only.









Piccolo



TAN

COLOUR RANGE

190 x 15/4mm Click Profile

(Victoria stocks T&G, Click by request)

Our pre-finished colour range is available as ABCD or AB Grade. ABCD Grade contains knots and other natural Oak characteristics. AB Grade is a cleaner looking plank with limited small knots and virtually no sapwood. AB Grade only available in T&G profile, selected colours. Raw (uncoated) is available for onsite finishing.



Castle Grey

Ebony


Chateau Grey



Colonial Grey



Chocolate Brown

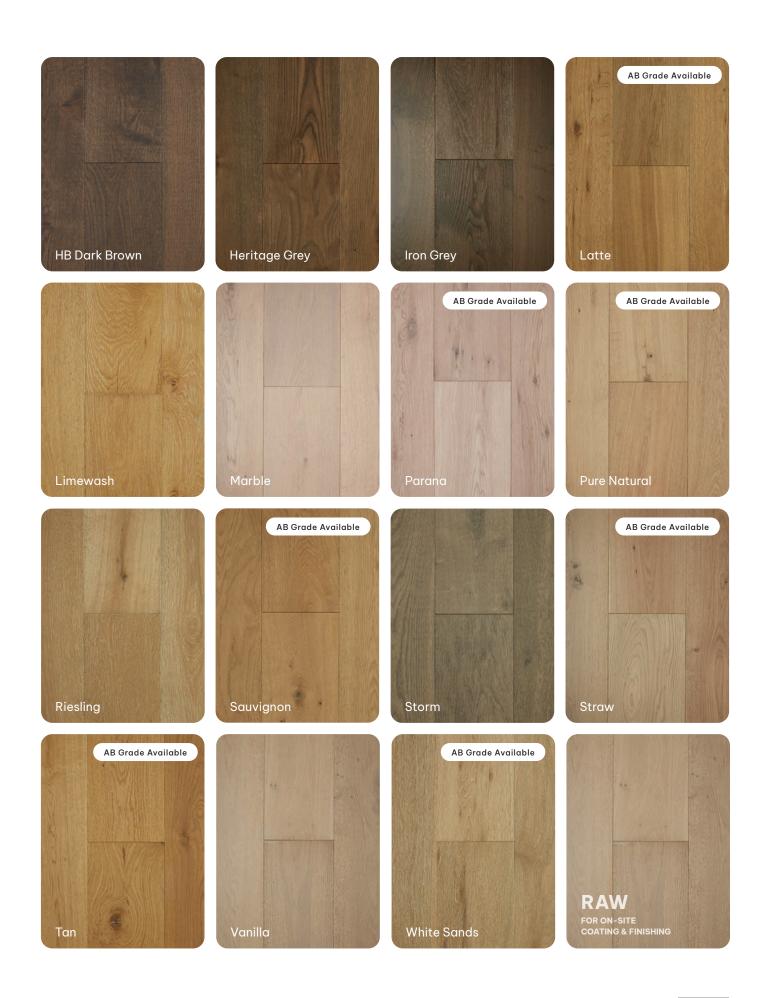

* Images for illustrative purposes only, batch, visual grade & store display variations will occur. 190 x 15/4mm T&G stock Victoria only, other states please check. Ranges & Colours are updated throughout the year, please check website, preferencefloors.com.au or your local office for availability.

MARBLE

COLOUR RANGE

220 x 21/6mm T&G Profile

Our pre-finished colour range is available as ABCD or AB Grade. ABCD Grade contains knots and other natural Oak characteristics. AB Grade is a cleaner looking plank with limited small knots and virtually no sapwood. AB Grade only available in T&G profile, selected colours. Raw (uncoated) is available for onsite finishing.










Bleached Driftwood



Cannes



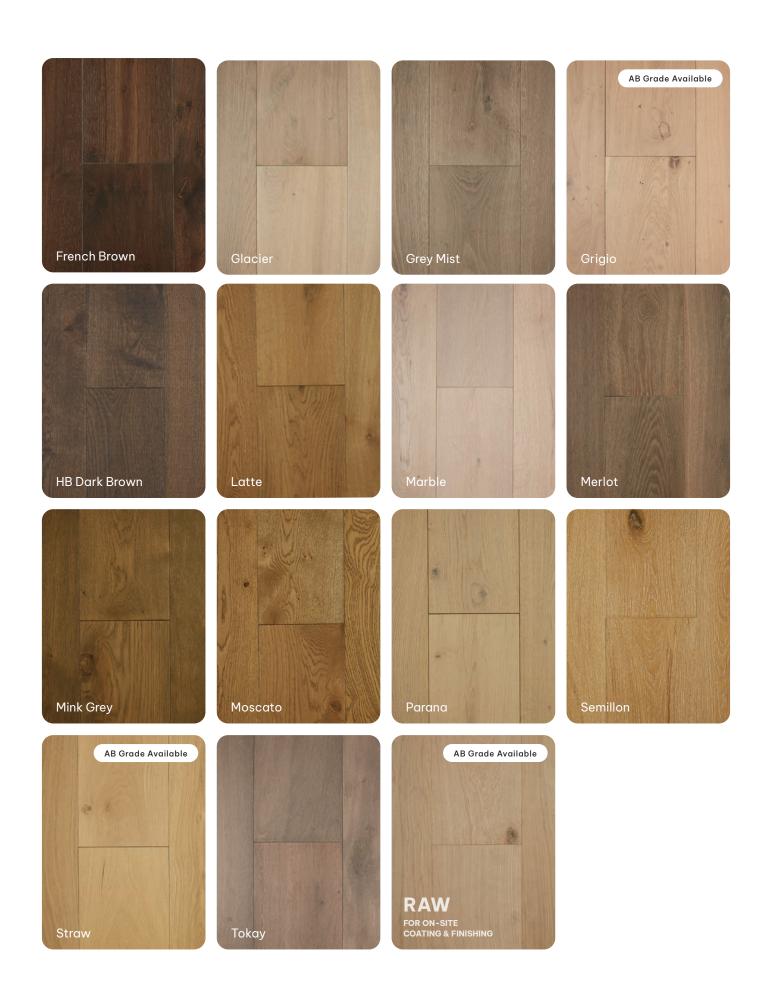

* Images for illustrative purposes only, batch, visual grade & store display variations will occur. Ranges and colours are updated throughout the year, please check website, <u>preferencefloors.com.au</u> or your local office for availability.

Timber connects us to nature, making us feel happier and more relaxed



Earth-friendly along the whole value chain

Our products are sourced with complete consideration for the environment and with healthy living in mind. Prestige Oak flooring products are manufactured using advanced production technology utiltising sustainable raw materials and non-toxic coatings that deliver an ethical product framework from beginning to end.

5 ENVIRONMENTAL BENEFITS OF TIMBER FLOORING

Energy Saving

Timber processing requires the least amount of energy of the most common building materials. Carbon emissions from timber floor manufacturing are less than 2 tonnes of CO², in comparison to the 5, 11 and 12 tonnes from tiles, steel and concrete respectively.

Energy Efficiency

Timber acts as an excellent insulator, with a cellular structure that allows for air pockets, helping to slow the conductivity of heat. Less use of heating and cooling systems = better for the environment (and your pocket!).

Carbon Storage

Purchasing timber floors means that you're providing a place for carbon to live. Up to half the dry weight of wood is carbon that's been absorbed from the atmosphere by trees as they grow. After processing the carbon remains embodied in the timber flooring and stops it from escaping into the atmosphere.


Health

In Japan numerous health studies suggest that by using timber materials for interiors can provide perceived health benefits such as: lowered stress levels, lower heart rate, improved levels of selfexpression and emotional state and improved air-quality. Unlike textile flooring materials such as carpet, timber floors do not harbour nasty allergens that might aggravate respiratory conditions.

Durability

Timber is a hard, and incredibly durable material that can last a lifetime! Compare this to materials such as carpet, which may need to be replaced every 10-15 years, this comes at an environmental cost... more waste, more energy to replace!

Every m³ of timber equals 1 tonne of stored carbon 1m³ = 70m² of 190 x 15mm Oak Flooring

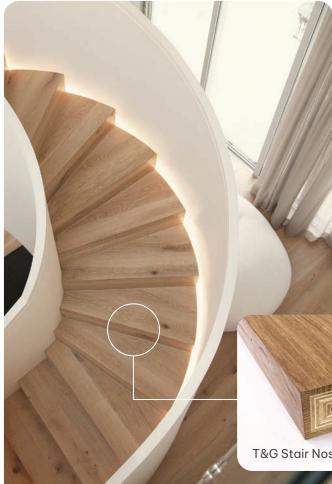

ACCESSORIES Stair Nosing

Both Tongue & Groove and Click Stair nosing are available to support our range of Engineered Oak products. Stair nosing can be supplied directly from Preference Floors to suit your colour selection or a Reseller may offer these directly from a third party manufacturing to suit local building regulations.

If stairs are involved in your project it is wise to spend time discussing this matter prior to purchase.

*These images are for illustrative purposes only





ACCESSORIES Trims & Scotia

An extensive range of Scotia colours and Aluminium floor trims are available. These elements form an integral part of all floor installations and especially when floating installations are required.

As per our installation guidelines, all floating installations will require perimeter expansion and transition trims. It is wise to spend time discussing trim requirements prior to purchase.







U Channel



Methods of engineered plank construction lay-up

The manufacturing of engineered flooring is designed to be resource efficient using up to 2/3'rds less of our valuable Oak resource when compared to solid timber flooring. Pre-finished engineered flooring is dimensionally stable enabling quicker installation with less site related trades to complete the flooring fit-out. No sanding, no mess for a fuss free installation.

The two popular methods of engineered construction include Multi-ply T&G & Click Profile. Both profile installation methods have proven to be highly reliable over many decades of use.

Multi-ply T&G

Provides a core manufactured from mixed hardwood with each core veneer (approx. 2mm) running in an alternate direction to the next veneer. This provides enhanced radial and longitudinal stability. The T&G is profiled into this section. A wear layer of Solid Oak is then permanently bonded to the multi-ply core. Wear layer thickness will vary depending on the product selected, usually 3, 4 or 6mm.



Multi-ply Click Profile

Click profile is essentially the same type of construction with a patented click locking connection profiled into the multi-ply core. Click installation is designed for floating applications making the product quicker & easier to install. Wear layer thickness will vary depending on the product selected, usually 3 or 4mm.

